


MaxiTPMS

TS408

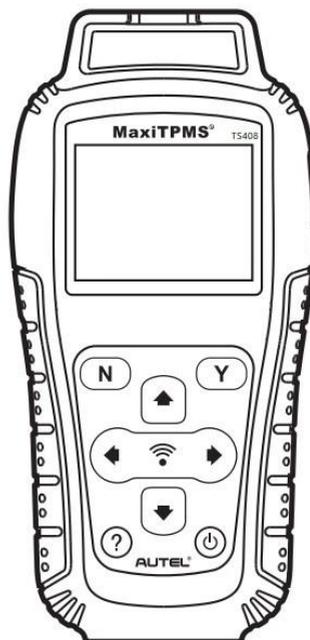

Patent

This product is protected by patents in the U.S. and elsewhere. For more information, please visit <https://autel.us/virtual-patents/>.

Trademarks

Autel®, MaxiSys®, MaxiDAS®, MaxiScan®, MaxiRecorder®, MaxiTPMS®, and MaxiCheck® are trademarks of Autel Intelligent Technology Corp., Ltd., registered in China, the United States and other countries. All other marks are trademarks or registered trademarks of their respective holders.

Copyright Information

No part of this manual may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of Autel.

Disclaimer of Warranties and Limitation of Liabilities

All information, specifications and illustrations in this manual are based on the latest information available at the time of printing.

Autel reserves the right to make changes at any time without notice. While information of this manual has been carefully checked for accuracy, no guarantee is given for the completeness and accuracy of the contents, including but not limited to the product specifications, functions, and illustrations.

Autel will not be liable for any direct damages or for any special, incidental, or indirect damages or for any economic consequential damages (including lost profits).

IMPORTANT

Before operating or maintaining this unit, please read this manual carefully, paying extra attention to the safety warnings and precautions.

For Services and Support



pro.autel.com

www.autel.com

www.maxitpms.com



1-855-288-3587 (North America)

+86 (0755) 8614-7779 (China)



supporttpms@auteltech.com

For details, please refer to the [Service and Support](#) section in this manual

Safety Information

For your own safety and the safety of others, and to prevent damage to the device and vehicles upon which it is used, it is important that the safety instructions herein presented throughout this manual be read and understood by all persons operating, or coming into contact with, the device.

There are various procedures, techniques, tools, and parts for servicing vehicles, as well as in the skill of the person doing the work. Because of the vast number of test applications and variations in the products that can be tested with this equipment, we cannot possibly anticipate or provide advice or safety messages to cover every circumstance. It is the automotive technician's responsibility to be knowledgeable of the system being tested. It is crucial to use proper service methods and test procedures. It is essential to perform tests in an appropriate and acceptable manner that does not endanger your safety, the safety of others in the work area, the device being used, or the vehicle being tested.

Before using the device, always refer to and follow the safety messages and applicable test procedures provided by the manufacturer of the vehicle or equipment being tested. Use the device only as described in this manual. Read, understand, and follow all safety messages and instructions in this manual.

Safety Messages

Safety messages are provided to help prevent personal injury and equipment damage. All safety messages are introduced by a signal word indicating the hazard level.

DANGER

Indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury to the operator or to bystanders.

WARNING

Indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury to the operator or to bystanders.

Safety Instructions

To prevent personal injury or damage to vehicles and/or the scan tool, read this instruction manual first and observe the following safety precautions at a minimum whenever working on a vehicle:

- Always perform diagnosis or service in a safe environment.

- Wear safety eye protection that meets ANSI standards.
- Keep clothing, hair, hands, tools, test equipment, etc. away from all moving or hot engine parts.
- Operate the vehicle in a well-ventilated work area: Exhaust gases are poisonous.
- Put blocks in front of the drive wheels and never leave the vehicle unattended while running tests.
- Use extreme caution when working around the ignition coil, distributor cap, ignition wires and spark plugs. These components create hazardous voltages when the engine is running.
- Keep a fire extinguisher suitable for gasoline / chemical / electrical fires nearby.
- Put the transmission in PARK (for automatic transmission) or NEUTRAL (for manual transmission) and make sure the parking brake is engaged.
- Always turn the ignition off before connecting/disconnecting the OBD II Cable to/from the TPMS tool; otherwise it may cause the Malfunction Indicator Light (MIL) to turn on.
- Refer to the user's manual for the vehicle being serviced and adhere to all diagnostic procedures and precautions. Otherwise personal injury or unneeded repairs may result.
- Keep the TPMS tool dry, clean, free from oil, water and grease. Use a mild detergent on a clean cloth to clean the outside of the TPMS tool when necessary.

CONTENTS

1 USING THIS MANUAL	1
1.1 CONVENTIONS	1
1.1.1 Bold Text.....	1
1.1.2 Notes and Important Messages	1
1.1.3 Hyperlink	2
1.1.4 Illustrations.....	2
2 TOOL INFORMATION	3
2.1 FUNCTIONAL DESCRIPTION	3
2.2 SPECIFICATIONS	4
2.3 ACCESSORIES INCLUDED	5
2.4 ICONS	5
2.5 KEYBOARD	5
2.6 BATTERY CHARGING	5
2.7 POWER UP.....	6
3 TPMS QUICK MODE	7
3.1 VEHICLE IDENTIFICATION.....	7
3.1.1 Select by Model	8
3.1.2 Select by Year.....	8
3.2 SCAN ALL SENSORS.....	9
3.3 SCAN SINGLE SENSOR	12
3.4 PROGRAM SENSOR	14
3.4.1 Copy by Activation	14
3.4.2 Copy by Manual Input.....	16
3.4.3 Auto Create 1-16 Sensors.....	18

3.5	RELEARN PROCEDURE	20
3.6	SENSOR INFORMATION	21
3.6.1	MX-Sensor Information	21
3.6.2	OE Sensor Information.....	22
4	MISCELLANEOUS.....	23
4.1	TOOLKIT	23
4.2	LATEST TEST.....	24
4.3	MY DEVICE	24
4.3.1	Update	24
4.3.2	Setting.....	27
4.3.3	About.....	34
4.4	PRODUCT TROUBLESHOOTING.....	34
5	COMPLIANCE INFORMATION.....	35
6	WARRANTY AND SERVICE.....	37
6.1	LIMITED ONE YEAR WARRANTY	37
6.2	SERVICE AND SUPPORT	38

1 Using This Manual

This manual contains device usage instructions.

Some illustrations shown in this manual may contain modules and optional equipment that are not included in your system. Contact your sales representative for availability of other modules and optional tools or accessories.

1.1 Conventions

The following conventions are used.

1.1.1 Bold Text

Bold text is used to highlight selectable items such as buttons and menu options.

Example:

- Tap **OK**.

1.1.2 Notes and Important Messages

1.1.2.1 Notes

A **NOTE** provides helpful information such as additional explanations, tips, and comments.

Example:

NOTE

New batteries reach full capacity after approximately 3 to 5 charging and discharging cycles.

1.1.2.2 Important

IMPORTANT indicates a situation which, if not avoided, may result in damage to the test equipment or vehicle.

Example:

! **IMPORTANT**

Keep the cable away from heat, oil, sharp edges and moving parts. Replace damaged cables immediately.

1.1.3 Hyperlink

Hyperlinks or links that take you to other related articles, procedures, and illustrations are active in electronic documents. Blue italic text indicates a selectable hyperlink and blue underlined text indicates a website link or an email address link.

1.1.4 Illustrations

Illustrations used in this manual are samples, and the actual testing screen may vary for each vehicle being tested. Observe the menu titles and on-screen instructions to make correct option selection.

2 Tool Information

2.1 Functional Description



Figure 2-1 MaxiTPMS TS408

1. **SENSOR SLOT** — holds the MX-Sensor that needs to be programmed.
2. **LCD DISPLAY** — displays the menus and test screens.
3. **N N BUTTON** — cancels a selection (or action) from a menu or returns to the previous menu.
4. **UP ARROW BUTTON** — moves up through menu and submenu items in Menu Mode. When more than one set of data are retrieved, use this button to move up to the previous screens for additional data. It is also used to view the previous trouble codes when viewing DTCs.

5.  **LEFT ARROW BUTTON** — when scrolling through a screen of data or text, move to the previous character and view additional information on the previous screens, if the recorded data content covers more than one screen.
6.  **DOWN ARROW BUTTON** — moves down through menu and submenu items in Menu Mode. When more than one set of data are retrieved, use this button to move down to next screens for additional data. It is also used to view the next trouble codes when viewing DTCs.
7.  **HELP BUTTON** — provides help information.
8.  **POWER BUTTON** — long press the button to turn on/off the tool, or short press the button to return to the Home screen.
9.  **RIGHT ARROW BUTTON** — when scrolling through a screen of data or text, move to the next character and view additional information on the next screens, if the recorded data content covers more than one screen.
10.  **TEST BUTTON** — commences a TPMS test or confirms selections on the screen.
11.  **Y BUTTON** — confirms a selection (or action) from a menu.
12. **USB PORT** — connects the TPMS tool to computer for software update or battery charging.

 **NOTE**

Figures and illustrations, product's characteristics and functions, and included accessories in this User Manual are provided for reference only and may differ from the actual product. Product design and specifications may be changed without notice.

2.2 Specifications

Table 2-1 Specifications

Item	Description
Display	TFT color display (320 x 240 dpi)
Power	3.7 V Li-polymer battery
Operating Temp.	0 to 50 °C (32 to 122 °F)
Storage Temp.	-20 to 70 °C (-4 to 158 °F)
Dimensions	215 mm (8.46") * 105 mm (4.13") * 37 mm (1.46")

Item	Description
Weight	0.38 kg (0.84 lbs.)

2.3 Accessories Included

Please refer to the packing list for accessory details.

2.4 Icons

1.  – green changing internal block indicates battery charging.
2.  – indicates there is data stored in the tool.
3.  – indicates battery volume.
4.  – indicates USB communication with the computer is established.
5.  – indicates magnet is required to activate TPMS sensor.
6.  – indicates deflation is required to activate TPMS sensor.
7.  – indicates wheels will be checked one by one.
8.  – indicates the TPMS tool is sending signals to the tire sensor for activation and test in activation screen or indicates the sensor information is read by activation.

2.5 Keyboard

No solvents such as alcohol are allowed to clean the keypad or display. Use a mild nonabrasive detergent and a soft cotton cloth. Do not soak the keypad as the keypad is not waterproof.

2.6 Battery Charging

The TPMS tool has a 3.7 V built-in lithium-ion polymer rechargeable battery.

- **To charge battery by PC connection via USB cable**

1. Locate the USB port of the device.
2. Connect the device and PC with the USB cable.

- **To charge battery by power adapter and USB cable**

1. Locate the USB port of the device.
2. Connect the device and the power source with the power adapter and USB cable.

For optimum performance, always keep your tool sufficiently charged. It is recommended

that you charge the tool for over 2 hours before the first use.

NOTE

Only use the USB cable adapter included in our pack to charge this tool. The use of unapproved power supplies may damage your tool and void the tool warranty.

2.7 Power Up

Power up the TPMS tool by pressing the **Power** button, and wait for the Job Menu to appear.



Figure 2-2 TS408 Job Menu Screen

3 TPMS Quick Mode

Perform basic TPMS functions (**Scan All Sensors**, **Scan Single Sensor**, **Program Sensor**, **Relearn Procedure**, and **Sensor Information**) through the Quick Service Mode.



N
= Cancel

Y
= Confirm

3.1 Vehicle Identification

Select test vehicle to start a TPMS service session.



N
= Cancel

Y
= Confirm

3.1.1 Select by Model

Audi		12/45
6	A5	
7	A6	
8	A6 Allroad	
9	A6 Avant	
10	A6 Quattro	
11	A7	
12	A8	

N

= Cancel

Y

= Confirm

3.1.2 Select by Year

1. For vehicles using **Direct TPMS**:

Audi A8		1/5
1	01/2010-12/2022(433MHz 5Q0907275)	
2	11/2009-10/2017(433MHz)(4H/4L)	
3	01/2009-12/2019(Indirect)	
4	10/2002-12/2012(433MHz)(4E)	
5	01/1999-09/2002(433MHz)(4D)	

N

= Cancel

Y

= Confirm

Audi A8 01/2010-12/2022(433M		1/5
1	Scan All Sensors	
2	Scan Single Sensor	
3	Program Sensor	
4	Relearn Procedure	
5	Sensor Information	

Functions provided in Quick Mode: **Scan All Sensors, Scan Single Sensor, Program Sensor, Relearn Procedure, and Sensor Information.**

2. For vehicles using **Indirect TPMS**:

Audi A8		3/5
1	01/2010-12/2022(433MHz 5Q0907275)	
2	11/2009-10/2017(433MHz)(4H/4L)	
3	01/2009-12/2019(Indirect)	
4	10/2002-12/2012(433MHz)(4E)	
5	01/1999-09/2002(433MHz)(4D)	

N

= Cancel

Y

= Confirm

Relearn Procedure
Position relearn type: Automatic relearn
Relearn Procedure:
Indirect system, no TPMS sensors fitted
Reset procedure:
1. Inflate tires to placard.
2. Turn ignition to ON position (engine off)
.
OK

Follow the instructions displayed to perform Relearn Procedure for indirect TPMS.


3.2 Scan All Sensors

Audi A8 01/2010-12/2022(433M		1/5
1	Scan All Sensors	
2	Scan Single Sensor	
3	Program Sensor	
4	Relearn Procedure	
5	Sensor Information	


Select **Scan All Sensors**. Hold the tool close to the sensor or close to the tire sidewall right above the sensor.




Press **Trigger** to trigger the sensors.

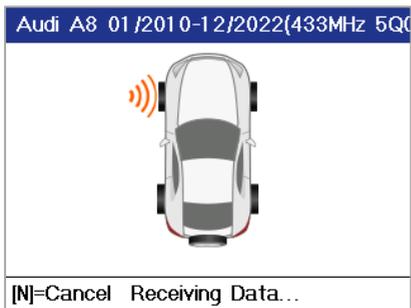

The device is receiving data from the sensor.

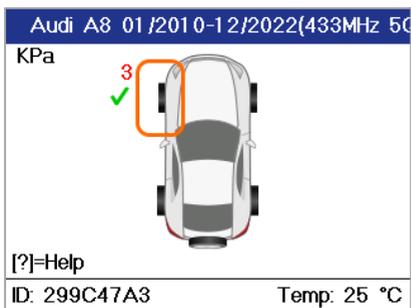


Trigger Successfully.

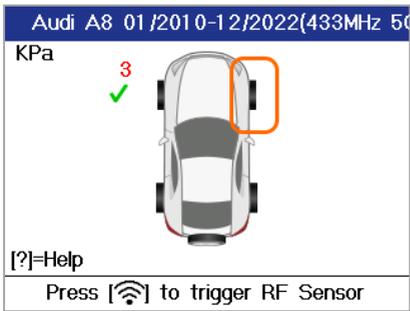

The next sensor is waiting to be activated. Press **Trigger** to scan all the sensors one by one.



If the trigger is failed, press **Trigger** to try again.

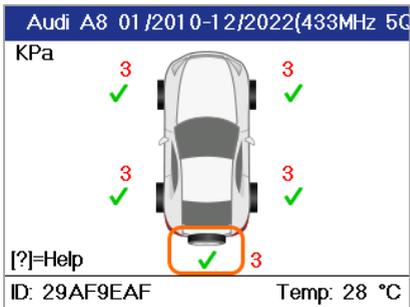

All the sensors are activated.

Sensor Status				
Pos.	ID(Hex)	P. (Kpa)	T. (°C)	Bat.
LF	294D1003	3	28	OK
RF	293A214B	3	29	OK
RR	294660CF	3	27	OK
LR	2907E10B	3	28	OK
SP	29AF9EAF	3	27	OK
Press any key to continue				

Press **Y** to view all the data of sensors. The ID, pressure, temperature, and voltage of all the sensors display on screen.

3.3 Scan Single Sensor

Audi A8 01/2010-12/2022(433I 2/5	
1	Scan All Sensors
2	Scan Single Sensor
3	Program Sensor
4	Relearn Procedure
5	Sensor Information

Hold the tool close to the sensor or close to the tire sidewall right above the sensor.


For first time use:



Press **Y** or **Trigger** to trigger the sensor.



The device is receiving data from the sensor.

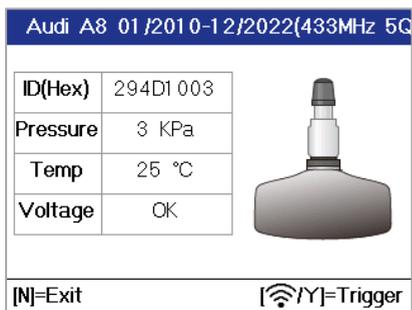

Trigger Successfully.

The ID, pressure, temperature, and voltage of the sensor display on screen.



Trigger Failed.

Press **Y** or **Trigger** to try again.

3.4 Program Sensor

Audi A8 01/2010-12/2022(433) 3/5	
1	Scan All Sensors
2	Scan Single Sensor
3	Program Sensor
4	Relearn Procedure
5	Sensor Information

Program Sensor 1/3	
1	Copy by Activation
2	Copy by Manual Input
3	Auto Create 1-16 Sensors

3.4.1 Copy by Activation

This function is used to activate or trigger the original sensor and retrieve the ID of the sensor, and then write the original sensor ID into the new MX-Sensor.

Program Sensor 1/3	
1	Copy by Activation
2	Copy by Manual Input
3	Auto Create 1-16 Sensors

Press **Y** to select **Copy by Activation**.

Copy by Activation 1/5	
1	LF Sensor ID
2	RF Sensor ID
3	RR Sensor ID
4	LR Sensor ID
5	SP Sensor ID
[N]=Exit	[Y]=Copy


Press the **UP/DOWN** arrow button to select the sensor to be copied. Place the tool near the sensor to be copied. If the sensor is still attached to the wheel, hold the tool close to the tire sidewall right above the sensor.



Press **Y** to enter the activation interface.



Press **Trigger** to activate the corresponding sensor.

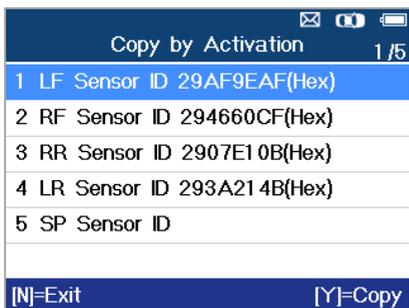

Press **N** to return to the previous menu. If the ID has been copied successfully, press **Y** to copy the selected ID and program the sensor.


If there is no ID yet, press **Y** to enter the activation interface.



If the sensor programming is successful, the sensor icon will appear on the right side of the list item.

3.4.2 Copy by Manual Input


This function is used to manually input the original sensor ID and program it to new MX-Sensor.

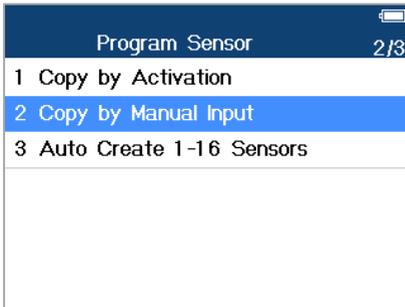

= Cancel



= Confirm

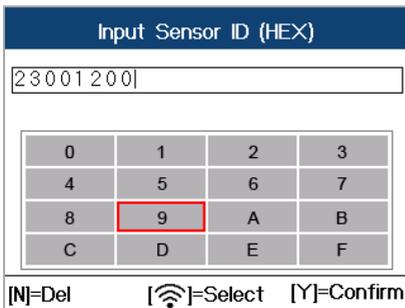

- DEC — ID is coded in decimal.
- HEX — ID is coded in hexadecimal (letters and numbers).
- AUTO — tool will automatically detect the format of the ID.

Copy by Manual Input

23001200
Do you want to save and continue?

No Yes

N
= Exit

Y
= Confirm and Program

Programming Sensor


Programming...

[N]=Cancel


The programming function begins.

Programming Sensor	
ID	23001200
PSN	C77E8L6M9C001026
Pressure	3 KPa
Temperature	27 °C
Voltage	OK
Frequency	433MHZ
Press any key to continue	


Once programmed, sensor and tire data will display.

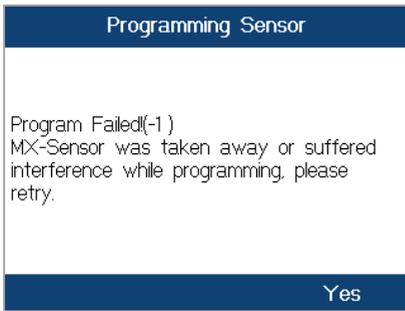

A failure message will display if the sensor fails to program. Press any key to continue. Ensure you are using an MX-Sensor with the correct frequency. Try to program sensor again.

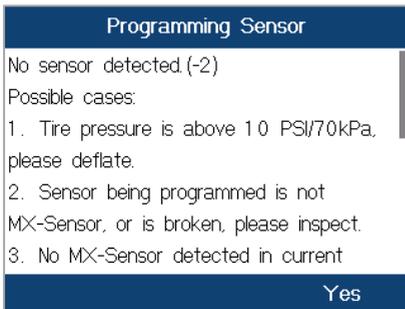


No sensor detected. Ensure the unit software is up-to-date.

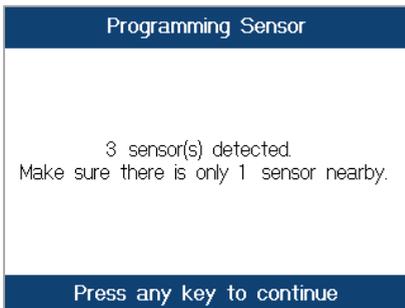


Multiple sensors detected. Ensure that only one sensor is close to the tool.

3.4.3 Auto Create 1-16 Sensors


This function is used to auto create new unique ID(s) into 1-16 MX-Sensor(s).

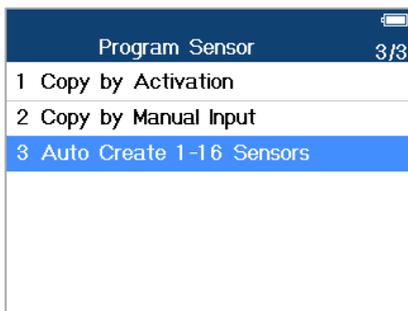

Place 1-16 MX-Sensor(s) close to the top of the tool.

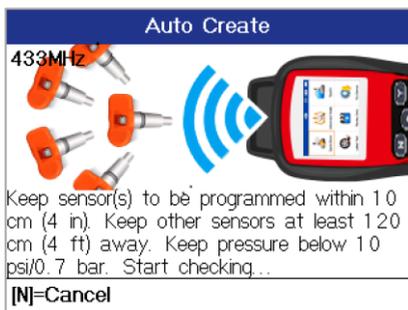

The tool will automatically detect the sensors near the tool.

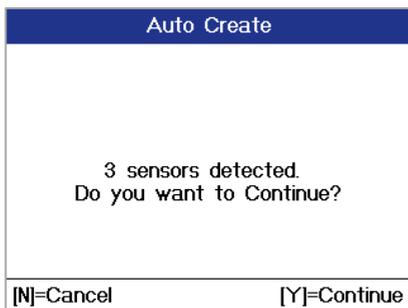


N

= Cancel

Y

= Confirm

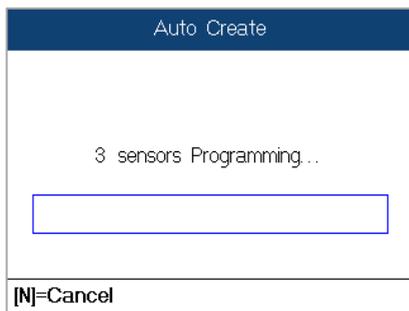


Auto Create		
NO	ID	PSN
01	29000007	C77D8L6JAC000007
02	29000003	C77D8L6JAC000003
03	29001026	C77E8L6M9C001026

OK


Once the sensors are successfully programmed, the sensor IDs and the PSNs (Product Serial Number) will display on the tool.

3.5 Relearn Procedure

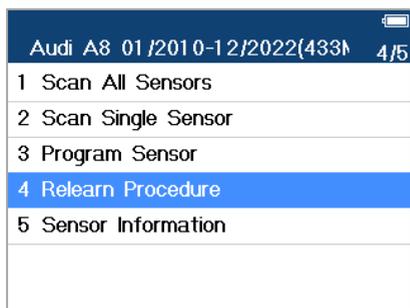

N
= Cancel

Y
= Confirm

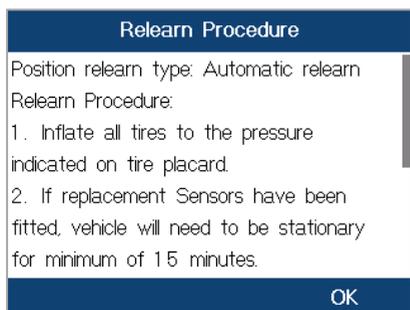

Read the Relearn Procedure carefully to complete the operation.

3.6 Sensor Information

Audi A8 01/2010-12/2022(433) 5/5	
1	Scan All Sensors
2	Scan Single Sensor
3	Program Sensor
4	Relearn Procedure
5	Sensor Information

N

= Cancel

Y

= Confirm

3.6.1 MX-Sensor Information

Sensor Information 1/2	
1	MX-Sensor Information
2	OE Sensor Information

Place an MX-Sensor near the top of the tool and then press **Y**.

Y

= Confirm

MX-Sensor Information	
	
Keep the sensor to be checked within 10 cm (4 in). Keep other sensors at least 120 cm (4 ft) away. Start checking...	
[N]=Cancel	

MX-Sensor Information	
Sensor ID	29001026
Frequency	433/315Mhz
Voltage	2.98V
HW	8306
SW	V6.38
AC/PI	FF00/0169
PSN	C77E8L6M9C001026
PV/PT/MI	2.97/26.0/B1114
PD	23-01-08
Press any key to continue	

NOTE

Area Code is the code used to identify the area of your tool for Autel Support when you file a report.

3.6.2 OE Sensor Information

Sensor Information	
1	MX-Sensor Information
2	OE Sensor Information

N

= Cancel

Y

= Confirm

OE Sensor Information	
OE Manufactuer	Huf/Beru
OE Frequency	433MHz
Relearn Type	A
OE Part Number	5Q0907275/5Q0907275B
Number On	RDE01 8

OK

The tool will automatically display the information of the OE sensor.

4 Miscellaneous

4.1 ToolKit

Test strength of remoteless key fob signal.

1. Select **ToolKit** from the Job Menu and press the **Y** button to confirm.
2. The screen displays as below. Select **RKE & RF Monitor** and press **Y** to confirm.

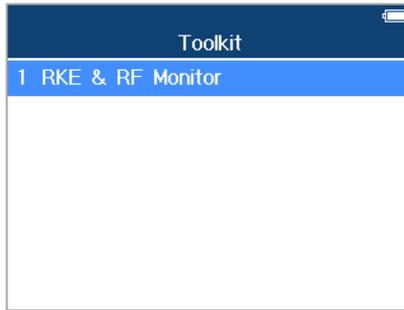


Figure 4-1 RKE & RF Monitor Menu

3. Hold the key fob close to the tool and press the function buttons on key fob to test. If the button works and the key fob is sending a signal, the tool will beep and the screen displays as below. If the button does not work, the tool will do nothing. To make sure each button is working properly, please test each button in turn.

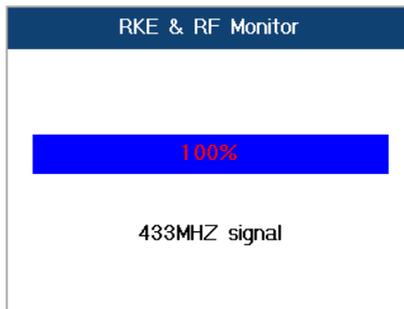


Figure 4-2 Receive Signal Screen

4. The progress bar indicates the approximate signal strength of the key fob.
 - The stronger the signal, the higher the beep tone.
 - The tool tests only 315 MHz and 433 MHz key fobs.
5. Press the **N** button to return to the previous menu.

4.2 Latest Test

The **Latest Test** function enables users to review the last tested sensor data and activate the sensor by using the wave signal of the latest trigger event.

4.3 My Device

The **My Device** function enables users to update the software, view or change device settings, and view software and hardware versions.

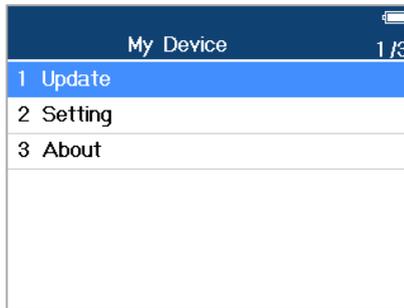


Figure 4-3 My Device Menu

4.3.1 Update

This function allows you to update the tool's software through your computer by installing the **Maxi PC Suite**. You can use a **Mac (os x 10.11 or later)** or a **Windows-based** computer to download the suitable version from the www.maxitpms.com and proceed.

The update procedures for the Mac and Windows versions of the Maxi PC Suite are the same. The Windows version is taken as an example here.

Connect the tool to a Windows-based computer using the supplied USB cable. Power on the tool.

Follow the update procedure to finish updating.

1. Download the **Maxi PC Suite** from www.maxitpms.com > Product > MaxiTPMS TS408 > Downloads, and install it onto your Windows-based computer.
2. Run the **Maxi PC Suite** on the computer.
3. Select **Update** on the My Device Menu to enter Update Mode.

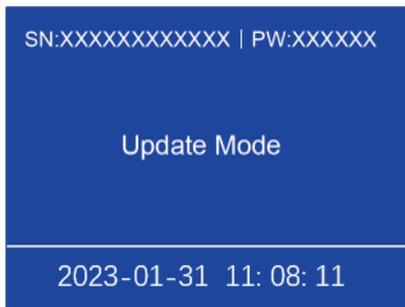


Figure 4-4 Update Mode

4. The Maxi PC Suite will automatically detect the connected device's serial number. If the connected device has not been registered yet, a message displays.

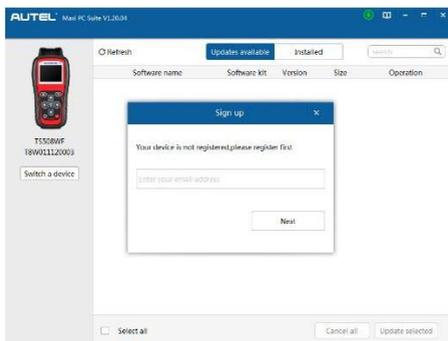


Figure 4-5 Registration Reminder

5. Enter your email address to register, click **Next** to continue.
6. If you haven't registered before, a verification code will be sent to your email address. Input your password and the verification code you received, and then click **Sign up** to register the connected device. If the connected device has already been registered, the **Maxi PC Suite** will enter the Update Menu directly. If you have registered before, input your password and proceed.

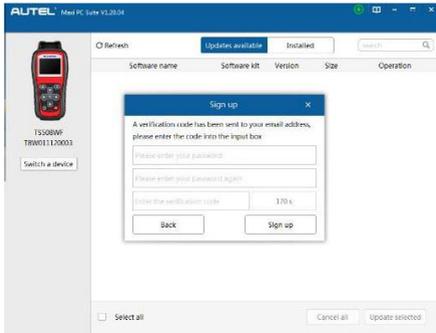


Figure 4-6 Registration Dialog Box Window

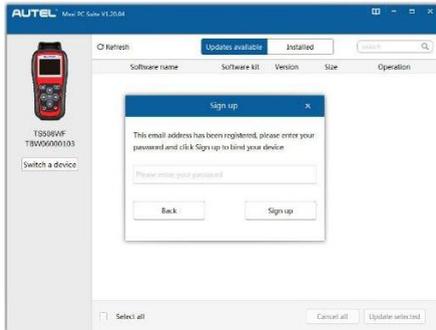


Figure 4-7 Registration Dialog Box Window

7. On the Updates Available page, select the appropriate files to install.

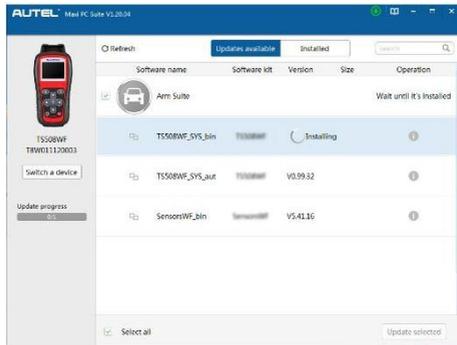


Figure 4-8 Update Window

- When the update is completed, a “Program Update End” screen displays on the tool.

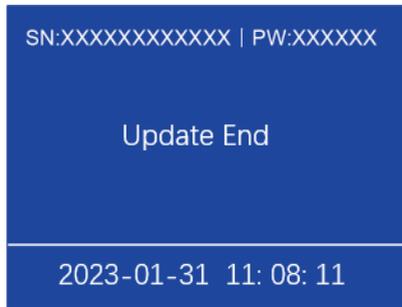


Figure 4-9 Program Update End

4.3.2 Setting

The tool allows you to make the following adjustments and settings.

- Market:** selects the operating region of the tool.
- Language:** selects the operating language of the tool.
- ID Format:** sets the ID display to Hexadecimal or Decimal.
- Pressure Unit:** sets the pressure unit in kPa, psi, or bar.
- Temperature Unit:** sets the temperature unit in degrees to Celsius or Fahrenheit.
- Distance Unit:** sets the distance unit in km or mile.
- Beep Set:** turns on/off key-press beep.
- Power-off:** sets the amount of time of inactivity before the tool automatically powers off.
- Date and Time:** sets date and time on tool.
- TPS Prog Limit:** sets TPS Prog Limit on or off.

NOTE

The tool settings are defaulted until changes are made.

4.3.2.1 Enter the Setting Menu

From the Job Menu: select **Setting** and press the **Y** button. The Settings Menu displays as below.

System Setup		1 / 10
1	Market	America
2	Language	English
3	ID Format	Hex
4	Pressure Unit	Kpa
5	Temp Unit	°C
6	Distance Unit	km
7	Beep Set	On

Figure 4-10 System Setup Screen

Market

NOTE

The default market selection depends on the area the tool is sold.

1. From the System Setup screen, use the **UP/DOWN** arrow button to select **Market**, and press the **Y** button.
2. Use the **UP/DOWN** arrow button to select the desired market or tool operating region and press the **Y** button to save your selection and return to the previous menu.

Market		2 / 5
1	Europe	
2	America	
3	Japanese	
4	Korea	
5	Australia	

Figure 4-11 Market Selection Screen

Language

NOTE

English is the default language.

1. From the System Setup screen, use the **UP/DOWN** arrow button to select **Language**, and press the **Y** button.
2. Use the **UP/DOWN** arrow button to select the desired language and press the **Y**

button to save your selection and return to the previous menu.



Figure 4-12 Language Selection Screen

ID Format

1. From the System Setup screen, use the **UP/DOWN** arrow button to select **ID Format**, and press the **Y** button.
2. From the ID Format screen, use the **LEFT/RIGHT** arrow button to select the desired ID format.



Figure 4-13 ID Format Screen

3. Press the **Y** button to save your settings and return to the previous menu, or press the **N** button to exit without change.

Pressure Unit

1. From the System Setup screen, use the **UP/DOWN** arrow button to select **Pressure Unit**, and press the **Y** button.
2. From the Pressure Unit screen, use the **LEFT/RIGHT** arrow button to select the desired unit: **kPa**, **psi**, or **bar**.



Figure 4-14 Pressure Unit Screen

3. Press the **Y** button to save your settings and return to the previous menu, or press the **N** button to exit without change.

Temperature Unit

1. From System Setup screen, use the **UP/DOWN** arrow button to select **Temperature Unit**, and press the **Y** button.
2. From Temperature Unit screen, use the **LEFT/RIGHT** arrow button to select the desired unit of the temperature.

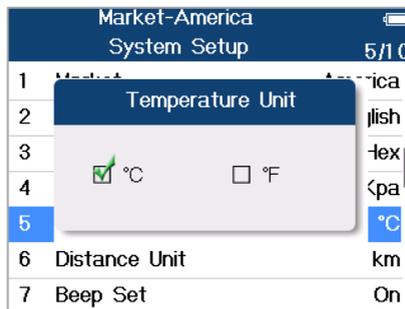


Figure 4-15 Temperature Unit Screen

3. Press the **Y** button to save your settings and return to the previous menu, or press the **N** button to exit without change.

Distance Unit

1. From the System Setup screen, use the **UP/DOWN** arrow button to select **Distance Unit**, and press the **Y** button.
2. From the Distance Unit screen, use the **LEFT/RIGHT** arrow button to select the

desired unit of distance: **km** or **mile**.

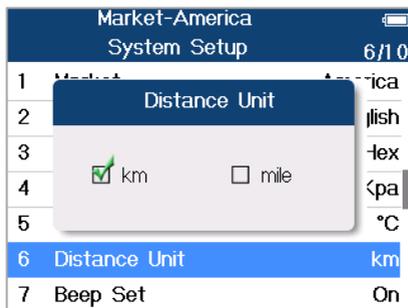


Figure 4-16 Distance Unit Screen

3. Press the **Y** button to save your settings and return to the previous menu, or press the **N** button to exit without change.

Beep Set

This function allows you to turn on/off the built-in speaker for key pressing.

1. From the System Setup screen, use the **UP/DOWN** arrow button to select **Beep Set**, and press the **Y** button.
2. From the Beep Set screen, use the **LEFT/RIGHT** arrow button to select **ON** or **OFF** to turn on/off the beep.

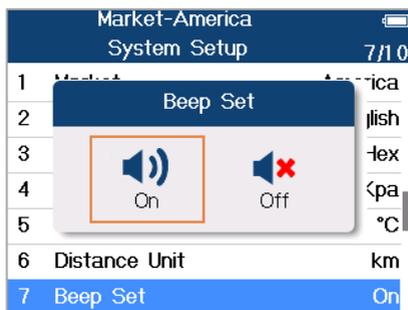


Figure 4-17 Beep Set Screen

3. Press the **Y** button to save your selection or the **N** button to exit without change.

Power-off

1. From the System Setup screen, use the **UP/DOWN** arrow button to select **Power-**

off, and press the **Y** button.

2. Press the **UP/DOWN** arrow button to increase or decrease the amount of time of inactivity before the tool automatically powers off. Press the **Y** button to confirm your change or the **N** button to exit without change.



Figure 4-18 Auto Power-off Screen

NOTE

1. Before the tool powers off automatically, it will save all the TPMS test data. Next time when the tool is powered on, you may retrieve the recorded data or return to the last operation.
 2. When using external power, the tool stays on until turned off. When using internal battery power, the tool turns off automatically after a set time of inactivity.
-

Date and Time

This function sets time and date on tool.

1. From the System Setup screen, use **UP/DOWN** arrow button to select **Date and Time**, and press the **Y** button to confirm; wait for the Date and Time screen to display.
2. Use the **UP/DOWN** arrow button to increase or decrease the value and use the **LEFT/RIGHT** arrow button to select the item to change.



Figure 4-19 Date and Time Screen

TPS Prog Limit

This function sets to **ON** or **OFF** the TPS Prog Limit.

Press the **UP/DOWN** arrow button to select the on/off TPS Prog Limit (tire pressure programming limit).



Figure 4-20 TPS Prog. Limit Screen 1

Select **Prog. Pressure≤69 kPa (On)**. If the pressure exceeds 69 kPa, the sensor cannot be programmed. If it is off, the sensor can be programmed at any pressure value.

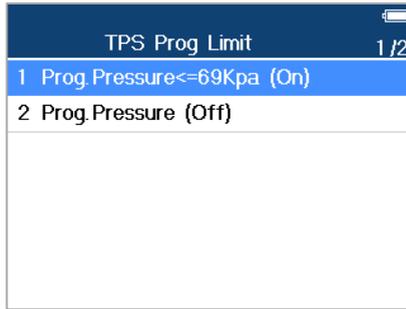


Figure 4-21 *TPS Prog. Limit Screen 2*

4.3.3 About

This function allows viewing of tool data such as serial number and software version number of the tool.

1. From **System Setup** screen, use the **UP/DOWN** arrow button to select **About**, and press the **Y** button; wait for the About screen to display.
2. View tool information on screen. Press the **N** button to exit.



Figure 4-22 *About Screen*

4.4 Product Troubleshooting

This part describes problems that you may encounter while using the TPMS tool.

If the tool freezes, reset the tool:

Turn the ignition off and wait for about 10 seconds. Turn the ignition back on and continue testing.

5 Compliance Information

FCC COMPLIANCE

FCC ID: WQ82016-TS408

This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Cet appareil est conforme aux CNR exempts de licence d'Industrie Canada. Son fonctionnement est soumis aux deux conditions suivantes:

1. Ce dispositif ne peut causer des interférences; et
2. Ce dispositif doit accepter toute interférence, y compris les interférences qui peuvent causer un mauvais fonctionnement de l'appareil.

WARNING

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- reorient or relocate the receiving antenna.
- increase the separation between the equipment and receiver.

- connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

RF WARNING STATEMENT

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

The term "IC" before the radio certification number only signifies that IC technical specifications were met.

RoHS COMPLIANCE

This device is declared to be in compliance with the European RoHS Directive 2011/65/EU.

CE COMPLIANCE

This product is declared to conform to the essential requirements of the following Directives and carries the CE mark accordingly:

EMC Directive 2014/30/EU

R&TTE Directive 1999/5/EC

Low Voltage Directive 2014/35/EU

6 Warranty and Service

6.1 Limited One Year Warranty

Autel Intelligent Technology Corp., Ltd. (the Company) warrants the original retail purchaser of this device that should this product or any part thereof during normal usage and under normal conditions be proven defective in material or workmanship that results in product failure within 1 year period from the date of delivery, such defect(s) will be repaired, or replaced (with new or rebuilt parts) with Proof of Purchase, at the Company's option, without charge for parts or labor directly related to the defect(s).

The Company shall not be liable for any incidental or consequential damages arising from the use, misuse, or mounting of the device. Some states do not allow limitation on how long an implied warranty lasts, so the above limitations may not apply to you.

This warranty does not apply to:

- 1) Products subjected to abnormal use or conditions, accident, mishandling, neglect, unauthorized alteration, misuse, improper installation or repair or improper storage;
- 2) Products whose mechanical serial number or electronic serial number has been removed, altered or defaced;
- 3) Damage from exposure to excessive temperatures or extreme environmental conditions;
- 4) Damage resulting from connection to, or use of any accessory or other product not approved or authorized by the Company;
- 5) Defects in appearance, cosmetic, decorative or structural items such as framing and non-operative parts.
- 6) Products damaged from external causes such as fire, dirt, sand, battery leakage, blown fuse, theft or improper usage of any electrical source.

⚠ IMPORTANT

All contents of the product may be deleted during the process of repair. You should create a back-up copy of any contents of your product before delivering the product for warranty service.

6.2 Service and Support

If you have any question or problem about the operation of the product, please contact us (see the following contact info) or your local distributor.

Autel China Headquarters

- **Phone:** +86 (0755) 8614-7779 (Monday-Friday, 9AM-6PM Beijing Time)
- **Email:** supportpms@auteltech.com
- **Address:** Floor 2, Caihong Keji Building, 36 Hi-tech North Six Road, Songpingshan Community, Xili Sub-district, Nanshan District, Shenzhen City, China
- **Web:** www.autel.com; www.maxitpms.com

Autel North America

- **Phone:** 1-855-288-3587 (Monday-Friday, 9AM-6PM Eastern Time)
- **Email:** ussupport@autel.com
- **Address:** 36 Harbor Park Drive, Port Washington, New York, USA 11050
- **Web:** www.autel.com/us

Autel Europe

- **Phone:** +49(0)89 540299608 (Monday-Friday, 9AM-6PM Berlin Time)
- **Email:** support.eu@autel.com
- **Address:** Landsberger Str. 408, 81241 München, Germany
- **Web:** www.autel.eu

Autel APAC

Japan:

- **Phone:** +81-045-548-6282
- **Email:** support.jp@autel.com
- **Address:** 6th Floor, Ari-nadoribiru 3-7-7, Shinyokohama, Kohoku-ku, Yokohama-shi, Kanagawa-ken, 222-0033 Japan
- **Web:** www.autel.com/jp

Australia:

- **Email:** ausupport@autel.com
- **Address:** Unit 5, 25 Veronica Street, Capalaba

Autel IMEA

- **Phone:** +971 585 002709 (in UAE)
- **Email:** imea-support@autel.com
- **Address:** 906-17, Preatoni Tower (Cluster L), Jumeirah Lakes Tower, DMCC, Dubai, UAE
- **Web:** www.autel.com

Autel Latin America

Mexico:

- **Phone:** +52 33 1001 7880 (Spanish in Mexico)
- **Email:** latsupport@autel.com
- **Address:** Avenida Americas 1905, 6B, Colonia Aldrete, Guadalajara, Jalisco, Mexico

Brazil:

- **Email:** brsupport@autel.com
- **Address:** Avenida José de Souza Campos n° 900, sala 32 Nova Campinas Campinas – SP, Brazil
- **Web:** www.autel.com/br

AUTEL[®]